
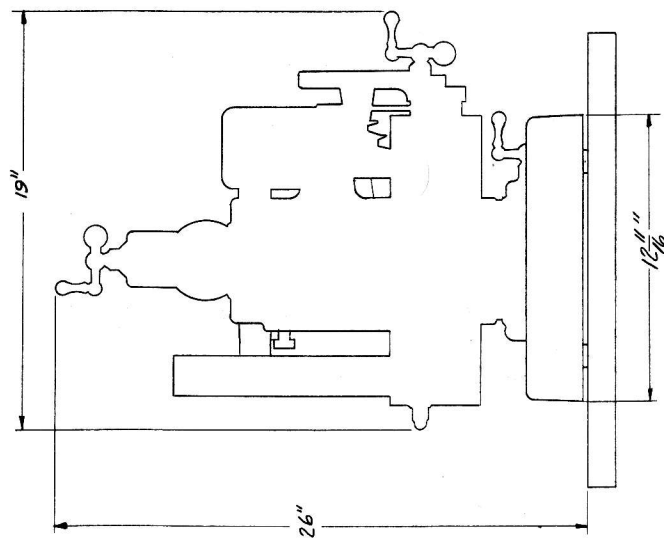
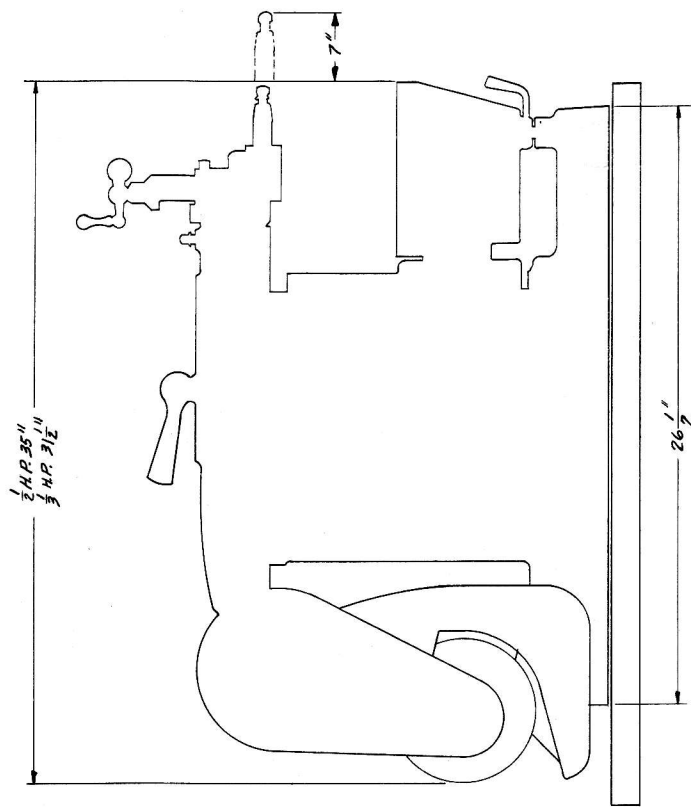


1. DRILL BENCH AS SHOWN AND BOLT SHAPER IN PLACE.
2. DO NOT RUN SHAPER WITH BELTS TOO TIGHT. IT MAY CAUSE EXCESSIVE LOSS OF POWER AND DAMAGE BEARINGS.
3. ADJUST BELT TENSION SO THAT A MODERATE PRESSURE WITH THE THUMB WILL DEPRESS THE BELTS ABOUT ONE INCH.

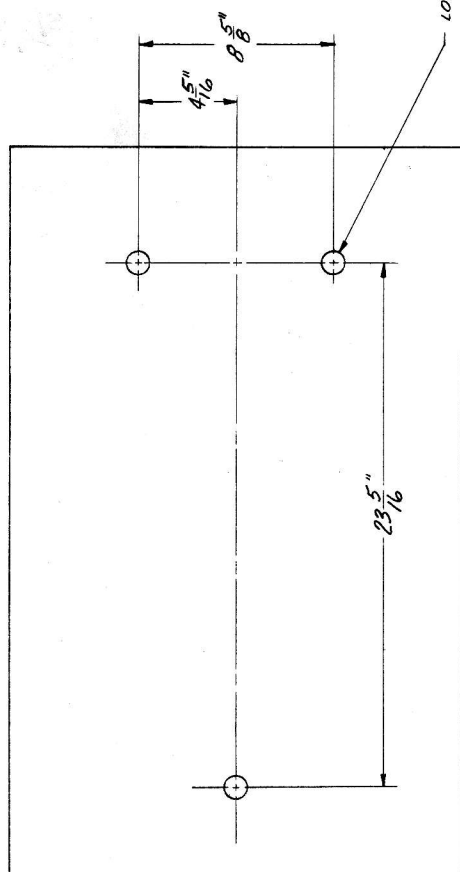

No. E. P-167
7" SHAPER
NONE
JAN 1967
FULTZ, C. Z.
5-20-52 6-3-52

NOTE:
ALL DIMENSIONS SHOWN ON THIS
DRAWING ARE APPROXIMATE.